



SKYLINE III

ZERO CLEARANCE DIRECT VENT GAS FIREPLACE









Unit Illustrated is a VRB46N Zero Clearance Direct Vent Gas Fireplace – Natural Gas, ZRB46S1SS Surround (Edge) Stainless Steel, and ZRB46PL Porcelain Liners.



Unit Illustrated is a VRB46N Zero Clearance Direct Vent Gas Fireplace – Natural Gas, ZRB46S2BL Surround (Frame) Black, MQ46D Three Piece Driftwood Log Set, MQSTONE Decorative Stones, and ZRB46PL Porcelain Liners.

Model VRB46N/NE VRB46LP/LPE Fuel Natural Propane Millivolt / IPI **Gas Control** Millivolt / IPI Input Max. 23.250 BTU 23.250 BTU Input Min. 15,750 BTU 17,750 BTU **FE** (P.4.1-02) 73.1% / 77.4% 75.7% / 80.3% Glass Size 40 %" x 13 %" 40 %" x 13 %" Venting ⁴⁄¬" Flex Vent Only ⁴⁄¬" Flex Vent Only

STANDARD FEATURES

- > Hi/Low Millivolt or IPI valve system will operate during power failures
- > Bronze Glass
- > Mobile Home, Bedroom and Bed Sitting Room approved
- > Safety Screen Barrier*



OPTIONAL FEATURES

Choice of Millivolt or IPI electronic ignition system with battery backup, and cold climate switch

Fan Kit – Heat activated with variable speed control

Universal Light Kit – (accent lighting) Two Lamps

Liners - Porcelain Reflective or Fluted

Surround Trim Kit – Black, or Stainless; Available in two sizes – Frame and Edge

Wall Mount Thermostat – Standard on/off or Programmable 5 day (weekday) and 2 day (weekend)

Driftwood – Three Piece Driftwood Set (MQ46D), Four Pieces Driftwood with Four Rocks (MQRBD1), Three Piece Driftwood Log Set (MQRBD4) or Five Piece Driftwood Set (MQRBD3)

Rock Sets – Contemporary Collection in Natural, or Multi-Colored

Decorative Stones or Ember Chunks

Decorative Ember Glass – Glacier Ice, White, Cobalt (Blue), Black or Bronze

Remote Controls – Thermostat on/off, Thermostat on/off modulating, Thermostat on/off modulating and fan control



Enclosure Grill

 * All gas fireplaces manufactured as of January 1, 2015 include a Safety Screen Barrier.

ACCESSORIES

WALL SURROUND

FRAME & EDGE

BLACK

STAINLESS

STYLING





ROCK COLLECTION



MULTI-COLOR CANNONBALLS





DRIFTWOOD DECORATIVE STONE










DECORATIVE EMBER GLASS

BRICK LINER




FLUTED

PRODUCT DIMENSIONS

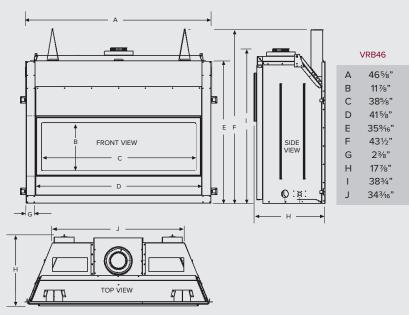

Model	Height		Front Width		Depth	
	Actual	Framing	Actual	Framing	Actual	Framing
VRB46	431/2"	433/4"	461/4"	47"	17 ⁷ /8"	18 ¹ /4"*
			* dependant of finishing material used			

WALL SURROUND TRIM KIT

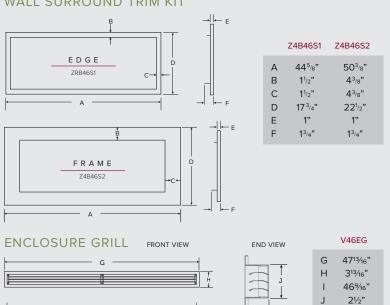


VENTED CHASE OPTION

When installing a TV above the fireplace, Cool Touch Walls, or reduced Mantel Clearances, the chase of the fireplace must be vented. This can be done by either installing a grill on the front of chase or side grills (for a chase that bumps out in to a room) or be open at the top of the chase. (See illustrations and manual for further information).

Minimum enclosure height for a vented chase is 70" from bottom of fireplace, ventilation of a 105 in² of minimum free air opening is required. Choose between our V46EG **Enclosure Grill or Custom Grill** (if custom grills are used the louvers cannot slope) or adequate ventilation opening as stated in the manual. Grill or opening must be within 2" of chase top/ceiling.

NOTE: To vent the fireplace chase, removal of vent shields from the fireplace is required.









19/16"













Marquis maintains a program of continuous testing, refinement and improvements of all its produc Some aspect of units shown here may be changed at any time without notice or obligation.

Certification: Model VRB46 is certified to ANSI 22188-2016, CSA 2.33-200

CGA 2.17-M91 (R2014) vented gas fireplace heat

*Components may have to be ordered separately to create a complete unit

Discuss with your local Marquis Dealer for clarification

