

Freestanding

Stove Series



Timeless: freestanding stoves

Our Freestanding Stove Series provides a choice between a variety of design styles, both traditional and transitional, without sacrificing the most important Valor ingredient—efficient, radiant warmth. Valor freestanding stoves provide a reliable heating source, adaptable to any living space, for years to come.

Radiant and Convective Heat

- ☐ Our freestanding stoves supply a constant flow of radiant heat and naturally convected warm air.
- ☐ Continuously warming objects in its path—including the human body— radiant heat satisfies your comfort needs with up to 25% less overall energy compared to forced air systems.
- ☐ Valor heaters utilize special steel and ceramic components that heat up quickly and reach efficiency in minutes.

Zone Heating

☐ With one or more in your main living zones, you can enjoy increased comfort while reducing furnace usage in colder weather or eliminating it during warmer spring and fall weather.

No Power, No Problem

☐ Engineered to circulate air through natural convection, Valor freestanding stoves are highly efficient without a fan—providing reliable heat, even during a power failure.

ValorStat PLUS Remote Control

- ☐ Easily select, adjust and program the desired temperature that you want, saving energy and lowering your overall home heating costs.
- ☐ **Pilot On Demand**: Turn your pilot light ON and OFF from the handheld remote for years of additional energy savings.
- ☐ Energy Saving Feature: The Valor SmartPilot System automatically shuts down if there's no activity after five days, reducing unnecessary pilot consumption.

Design

- □ Large windows provide visibility to a realistic flame and fire bed designed to offer efficiency.
- ☐ Capable of both top and rear vent applications.





Madrona

Timeless in design, the clean lines of the Madrona projects warmth and ambience and easily replaces an old wood stove.

- ☐ Available in an arched and square front design.
- ☐ Choose from Black powder coated or Majolica Brown enamel finish.
- ☐ Beautifully detailed cast iron craftsmanship
- ☐ Impressive radiant heating.
- ☐ Advanced sealed combustion, direct vent technology makes the Madrona the best in efficiency and safety.

Secondary Heat exchangers

Like most Valor fireplaces, the Madrona and President stoves have built-in secondary heat exchangers that naturally enhance the convected heat, removing the need for a fan.

President

Smaller size and input

Crafted with detail and inspired by classic design, the President freestanding stove is perfect for upgrading traditional and contemporary spaces.

- ☐ Projects a mere 14.5 inches into the room, leaving plenty of space.
- ☐ Shows great freestanding as well as tight against a wall.
- ☐ Solid cast iron encases a proven Valor Portrait engine.

BLACK CASTING MFCS01-1

SQUARE FRONT MFCS01-3

ARCHED FRONT MFCS01-2





LOGS MF28LSK





DRIFTWOOD MF28DWK

BLACK CASTING 531







DRIFTWOOD	530DWK
Optional Reflective Glass liner	580RGL

MAJOLICA BROWN ENAMEL CASTING MFCS02-1

SQUARE FRONT MFCS02-3

ARCHED FRONT MFCS02-2





LOGS MF28LSK



Black powder coated cast iron





DRIFTWOOD MF28DWK



Majolica Brown enamel cast iron

BLACK CASTING 531



COALS 530CSK

ROCKS 530RSK Reversible Black Fluted liner included




President Black powder coated cast iron


Reversible Red brick liner included


Viewing Area

square front: $21-\frac{3}{4}$ " w x 13" h = 283"²

arched front: 20-%" w x $13-\frac{1}{2}$ " h = 274" ² (minus frets)







Contact your local Valor dealer for complete installation and venting requirements.

MADRONA

DIRECT VENT	natural gas			MF28JN
ENGINE	propane			MF28JP
CASTING	Black			MFCS01-1
	Arched front, or			MFCS01-2 or
	Square front			MFCS01-3
	Majolica Brown Enamel			MFCS02-1
	Arched front, or			MFCS02-2 or
	Square front			MFCS02-3
FIRE BED	Logs Driftwood			MF28LSK
				MF28DWK
OPTIONAL	Valor Wall switch Circulating Fan			1265WSK
				555CFK
MODEL BTU/hour	Low	High	Max	Energuide*
NG	6,500	20.000	10.100	70%
LPG	14,500	26,000	19,123	

^{*} All Valor's EnerGuide ratings and outputs are determined without a fan/blower, using the CSA P4.1–09 test method.

FIREPLACE SAFETY— USE RADIANT HEAT SAFELY

Fireplace surfaces, in particular the glass viewing window, are extremely hot during operation and will remain hot for a period of time after the fireplace is turned off. Contact with the hot glass can cause severe burns. Close adult supervision is required if there are young children, or at-risk individuals in the house.

Included with your purchase, a Valor Barrier Screen is recommended at all times. Install an approved aftermarket safety gate to keep toddlers, young children and at-risk individuals a safe distance from the fireplace.

For more information please visit valorfireplaces.com/safety.











Copyright Miles Industries Ltd. 2017 Designed and manufactured by:




PRESIDENT

DIRECT VENT ENGINE	natural gas	530IN
	propane	530IP
CASTING	sides and top	531-1CSB and 531-2CSB
FIRE BED includes reversible Fluted Black/Red Brick liner	Coals	530CSK
	Logs	530LSK
	Rocks	530RSK
	Driftwood	530DWK
OPTIONAL	Valor Wall switch	1265WSK
	Circulating Fan	555CFK
	Firebox Grille Panel	567FGP

MODEL BTU/hour	Low	High	Max	Energuide*
NG	6,500	20,500	15,117	70.2%
LPG	12,500	19,000	14,476	70.%


^{*} All Valor's EnerGuide ratings and outputs are determined without a fan/blower, using the CSA P4.1–09 test method.


VENTING OPTIONS

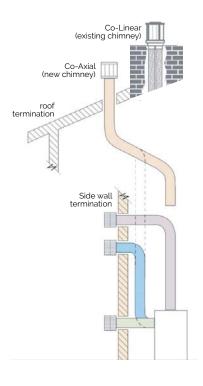


Viewing Area

 $16-\frac{3}{4}$ " w x $15-\frac{3}{8}$ " h = 258"²







Contact your local Valor dealer for complete installation and venting requirements







valorfireplaces.com