

Accentra52i Pellet Insert



HARMAN[®]
BUILT TO A STANDARD, NOT A PRICE

The best got better. This edition of the best-selling Accentra insert upgrades any existing fireplace opening with even heat, minimal maintenance and distinctive features. With the easiest operation and upkeep of any pellet insert, the Accentra52i makes it simple to enjoy your warm home.

The Accentra52i uses Harman PelletPro™ and ESP technology to burn any grade of pellet and provide an even heat within 1 degree. Warm larger spaces with the Accentra52i's big 53,000 BTUs. Reclaim your relaxation – a reengineered design means up to 50% less cleaning time than any other pellet appliance available.



Above: Accentra52i shown in optional porcelain majolica brown with ceramic log set


Cover: Accentra52i shown in matte black with ceramic log set

Features

- Easily operate using hidden, color control panel
- Move more warm air with dual 134 CFM blowers
- Up to 50% less cleaning time
- Less loading with up to 64.5lb hopper capacity
- Less maintenance with large ash pan
- Elegant flame-reactive mirrored glass
- Installation made easy with direct vent

Options

- Matte black or porcelain majolica brown finish
- Ceramic log set
- Fit larger fireplace openings with surround extensions
- Zero-clearance housing
- Harman service rail kit
- Outside air kit



Hidden control panel



Large hopper opening



An optional service rail kit makes it easy to install and perform maintenance





Accentra52i shown in optional porcelain majolica brown


Key Technologies More than 35 years of engineering excellence and heating performance, distilled into these exclusive technologies.




ESP Temperature Control Harman pellet stoves utilize an advanced Exhaust Sensing Probe (ESP) system to deliver precise heating control. ESP constantly monitors and adjusts heat output to maintain set room temperatures within one degree.



PelletPro™ Technology The patented PelletPro™ System makes it possible to burn any grade of pellet fuel with maximum heat and efficiency. A bottom-up feeding system burns each pellet completely, allows for 24-hour heating.



ESP Temperature Control helps maintain a consistent room temperature.

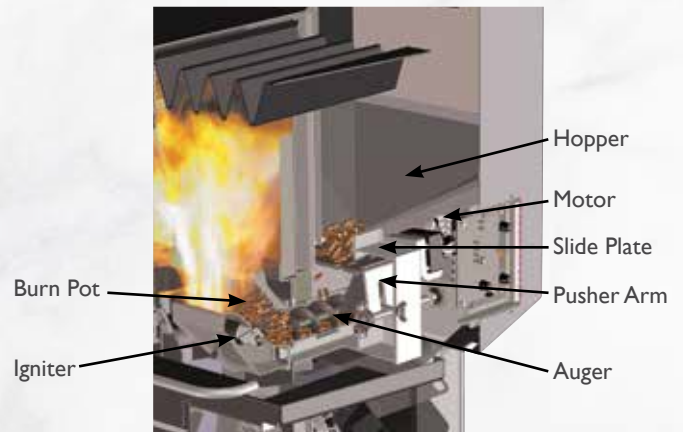


Accentra52i Specifications and Clearances

Specifications


BTU/Hr Input¹..... 13,800-53,000
 Efficiency²..... 81.7%
 Emissions..... 1.5 g/hr
 Heating Capacity³..... 900-2,400 sq ft

Hopper Capacity.....20" fireplace opening: 47-1/2 lb
 22" fireplace opening: 58 lb
 24" fireplace opening: 64-1/2 lb
 Fuel Type.....Pellet
 Feed Rate..... 1.5-5.8lb/hr
 Venting Size⁴..... 4" PL pellet vent pipe standard
 3" PL pellet vent pipe option

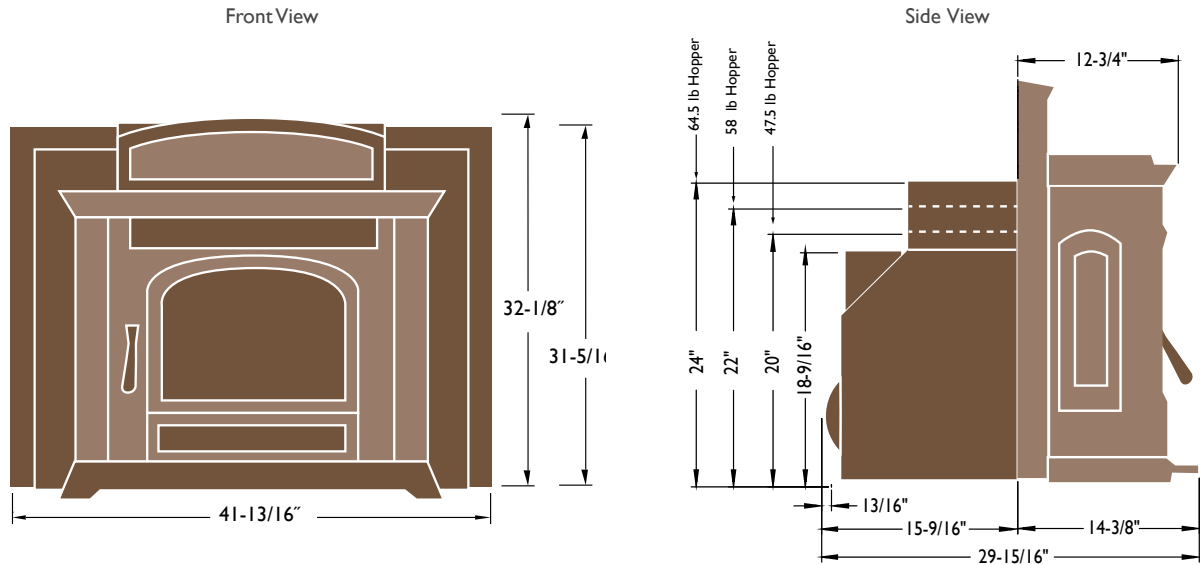

Clearance to Combustibles

- A Unit to sidewall..... 12"
- B Unit top to mantel..... 12"
- C Cast surround to 3/4" trim..... 0"
- D Cast surround to 3/4" trim..... 6"
- E Floor protector; spark and ember protection only; no required R value..... 6" (from glass)

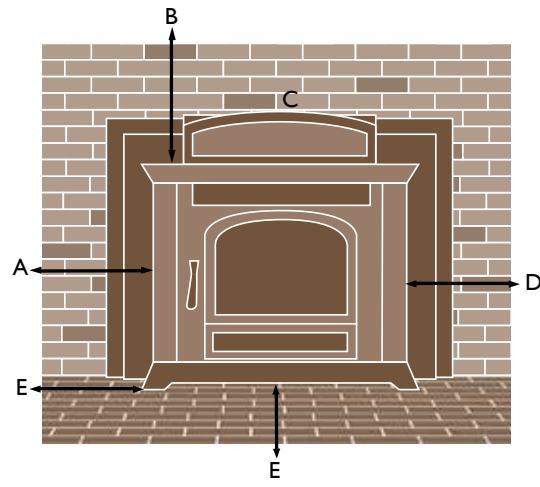

Floor protection: Minimum 16-1/2" deep by 30" wide.

A Standard of Excellence

In 1979, Dane Harman used his welding skills and design talent to build his first wood stove, setting the stage for a journey full of entrepreneurial energy and innovation. Built to a Standard and Not a Price has remained an unwavering promise since that first model was handcrafted, and is exemplified today through Harman's multiple patents and industry awards. Harman heating solutions are built to withstand the test of time with reliable warmth and aesthetic elegance, staying true to Dane's dedication to optimal performance and engineering excellence.



Your Harman dealer is:



PHONE: 800-664-3119
 WWW.HARMANSTOVES.COM

- facebook.com/HarmanStoves
- twitter.com/HarmanStoves
- youtube.com/HarmanStoves

HAR-1112U-0616

LIMITED LIFETIME WARRANTY⁵
 The strongest in the industry, Harman provides a limited lifetime warranty on most important aspects: firebox and heat exchanger.

¹EPA tested input. ²Weighted Average LHV (Low Heating Value) Efficiency. ³See your local authorized Harman dealer for help in determining the product that best suits your heating needs based on climate and home efficiency. ⁴When using 3" or 4" PL vent pipe, there must be 3" clearance to combustibles. ⁵For full warranty details, visit www.harmanstoves.com. Actual product appearance, including flame, may differ from image. Tested to: UL-C-5628-93 and ASTM E1509-12. Product specifications and pricing subject to change without notice. Power cords for the fans will run along the hearth and can be directed to either side of the appliance for flexible installation. The images and descriptions in this brochure are provided to assist you in product selection only. Fuel density and pellet shape may affect hopper capacity. BTUs may vary depending on type of fuel used. Refer to installation manual for complete clearance requirements and specifications. Fireplace, stove and insert surfaces get extremely HOT and can cause severe burns if touched. Keep a safe distance away. To learn more visit www.harmanstoves.com/fireplacesafety.